


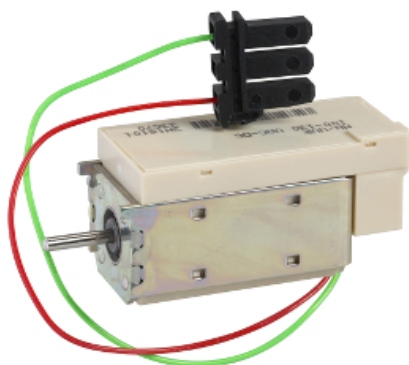

Main

Device short name	MN
Product or component type	Voltage release
Device application	Control
Range compatibility	Compact NS630b...1600 Masterpact NT
Voltage release type	Undervoltage release
[Uc] control circuit voltage	380...480 V AC

Complementary

Threshold tripping voltage	0.35...0.7 Un - during opening time 0.85 Un - during closing time
Supply holding power	4.5 VA
Mounting mode	Drawout
Response time	40 ms Masterpact NT

Contractual warranty

Warranty period	18 months
-----------------	-----------